

UNx™ BARE SHAFT PUMP

# 5200Q SERIES

## LOCKING ROD BOX

For ultimate safety, protection, and ease of service

## PRESSURIZED AND FILTERED OILING SYSTEM

Protects pump from damage with fan cooling and high temperature and low pressure shutdown system

## CRANKSHAFT SUPPORT SYSTEM

Four bearings support the shaft to ensure long-life operation

## FULLY INTEGRATED GEAR DRIVE

Gear ratios available for 1800 & 2100 RPM inputs. Includes shared oil sump

## QUINTUPLEX DESIGN

Five plungers reduce pulsation and vibration for smooth operation

## UNx FLUID END TECHNOLOGY

For in-the-field flexibility and decreased down time

<b>MAX. POWER</b>	700HP (522 KW)
<b>MAX. FLOW</b>	136.2 GPM (516 LPM) AT 8,000 PSI (551 BAR)
<b>DIMENSIONS L X W X H (in/mm)</b>	67.7 (1719) X 62.4 (1585) X 32.3 (820) (WITH OIL COOLING)

## POWER END SPECS

STROKE		CONNECTION TYPE	PUMP SPEED RANGE	MAX. POWER INPUT		TOTAL DRY WEIGHT w/ FLUID END		PUMP OIL		
in	mm			hp	kW	lb	kg	TYPE	CAPACITY	
			RPM						gal	l
5.25	133	DISCHARGE 15K: Jetstream HF 20K: Jetstream HHP 40K: Jetstream 40K	200-547	700	522	5000	2268	80W-90	27	102

To order Jetstream parts and accessories, call (800) 231-8192 or visit [www.waterblast.com](http://www.waterblast.com)

©2021 Jetstream of Houston, LLC. All rights reserved. UNx™ is a trademark of Federal Signal Corporation.



## FLUID END SPECS

INPUT RPM	PLUNGER SIZE NO.	MAX PUMP DISPLACEMENT**		MAX OPERATING PRESSURE	
		gpm	lpm	psi	bar
<b>MODEL 5220Q</b>					
<b>700 HP</b>					
1800	#11	55.1	208	20,000	1379
2100	#11	54.2	205		
<b>600 HP</b>					
1800	#11	46.4	176	20,000	1379
2100	#10	46.1	174		
<b>MODEL 5215Q</b>					
<b>700 HP</b>					
1800	#12	70.3	266	15,000	1035
	#13	87.0	329	12,500	863
	#15	109.8	416	10,000	690
2100	#12	69.2	262	15,000	1035
	#13	85.6	324	12,500	863
	#15	108.1	409	10,000	690
<b>600 HP</b>					
1800	#12	59.3	224	15,000	1035
	#13	73.4	277	12,500	863
	#15	92.6	350	10,000	690


\*\*Flow values represented refer to "theoretical" flow, neglecting inefficiency resulting from compressibility of water and expansion of pressure bearing components. Actual values may vary depending on the engine used to power the pump.



SEE IT IN ACTION

# 5200Q

BIG HORSEPOWER. BIG WATER. ALL JETSTREAM.

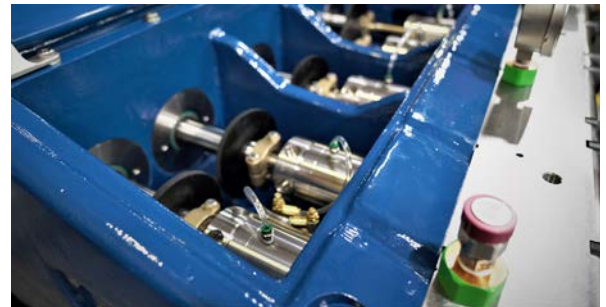

## OUR REACH



Jetstream Parts, Accessories and Rentals are also available through FS Solutions, with 13 convenient U.S. locations

**Gonzales, LA**  
(225) 647-0660

**LaPorte, TX**  
(281) 674-8668

**Leeds, AL**  
(800) 822-8785

**Salt Lake City, UT**  
(801) 808-4590

**Highland, IN**  
(219) 924-3180

**Streator, IL**  
(815) 672-6028

**Long Beach, CA**  
(866) 515-9891

**Lakewood, WA**  
(253) 584-0653

**Williston, ND**  
(701) 572-7421

**New Brunswick, NJ**  
(732) 448-7830

**Toledo, OH**  
(888) 415-7368

**Lexington, SC**  
(803) 996-0741

**Midland, TX**  
(432) 563-4450



800.231.8192  
sales@waterblast.com



www.waterblast.com



5905 Thomas Road  
Houston, TX 77041